

# GUARDFLEX

## VINYL EXAMINATION GLOVES

- ✓ Clear
- ✓ Blue
- ✓ Powdered
- ✓ Powder Free
- ✓ S - XL
- ✓ Ambidextrous

Formed from a synthetically derived polymer material, the Vinyl Glove offers enhanced protection.

### Attributes

- Made from PVC Plastisol Material
- Latex Free
- Smooth Texture
- Beaded cuff and finishing
- Soft and durable
- Non Sterile

### Regulatory Compliance

#### Complies with:

- BS EN455 1,2,3 and 4. Medical gloves for single use.
- European Standard EN420

#### Manufactured in accordance with:

- European Personal Protective Equipment Directive 89/686/EEC
- CE Category: Cat III (0086)
- EN420: Protective gloves: General requirements
- EN374-2 Protective gloves: Chemicals and Micro organisms penetration
- EN374-3 Protective gloves: Chemicals and Micro organisms permeation

#### Tested to:

- AQL 1.5
- Food approval EC1935/2004 (except fatty foods)
- Visually inspected for holes and minor defects
- Random samples are filled with 1L of water and examined for leaks
- Typical force at break: 3.6 Newtons
- Shelf life of 5 years

DIMENSION	S	M	L	XL
Palm Width (mm)	85 ± 3	95 ± 3	105 ± 3	115 ± 3
Length (mm)	240 ± 10	240 ± 10	240 ± 10	240 ± 10
Thickness (mm) palm	0.07 ± 0.01	0.07 ± 0.01	0.07 ± 0.01	0.07 ± 0.01
Thickness (mm) finger	0.05 - 0.1	0.05 - 0.1	0.05 - 0.1	0.05 - 0.1
Thickness (mm) cuff	0.05 ± 0.01	0.05 ± 0.01	0.05 ± 0.01	0.05 ± 0.01



01564 757 320



[www.quotexltd.com](http://www.quotexltd.com)




[sales@quotexltd.com](mailto:sales@quotexltd.com)

Quotex Systems Ltd, 17 Poplar Road, Dorridge, Solihull, B93 8DD

# GUARDFLEX

## VINYL EXAMINATION GLOVES

- ✓ Clear
- ✓ Blue
- ✓ Powdered
- ✓ Powder Free
- ✓ S - XL
- ✓ Ambidextrous

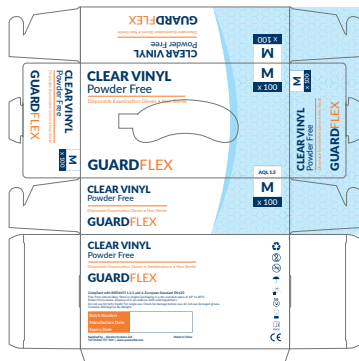

### Packaging

- INNER: 100 gloves per dispenser
- OUTER: 10 dispensers per case
- PALLET: 84 cases per pallet (approximately 84 cases per pallet dependent on customer racking)

### Dimensions


- Inner 210mm L x 110mm W x 60mm H
- Outer 310mm L x 220mm W x 230mm H



Do not re-use



Compliant with the Medical Devices Directive



Temperature limitation



Latex free



Acceptable quality level



Recyclable packaging



Keep dry



Use by



Keep away from direct sunlight and fluorescent lighting



01564 757 320



[www.quotexltd.com](http://www.quotexltd.com)



[sales@quotexltd.com](mailto:sales@quotexltd.com)

Quotex Systems Ltd, 17 Poplar Road, Dorridge, Solihull, B93 8DD